

POWER



Driven by passion.

DSP 4

Amplifier

DSP Amp and wireless reception 6 Channel Out with Built in 4 Channel Amplifier

TECHNICAL FEATURES

RMS Power (4 Ω) : 4 x 75 Watts

RMS Power (2 Ω) : 4 x 120 Watts

4 high level inputs

2 RCA low level inputs

6 RCA low level outputs

Frequency response : 20 Hz - 20 kHz

Distorsion : 0,1%

Signal/noise ratio : 95 dB

Standby current <0,4 mA

Maximum operating current 30 A

Dimensions : 160 x 146 x 46 mm

SUPPLIED ACCESSORIES

Audio streaming with the Bluetooth receptor included

Optional remote control

Optionnal Plug & Play wiring harness to install in all vehicules without cutting the original wires



DSP FEATURES

Bluetooth connection and DSP control and tuning via smartphone app

Time alignment adjustable from 0 up to 20 ms and phase tuning for each speaker




Independent 15 bans parametric equalized for all 6 outputs

Fully customizable crossover from 6 to 48 dB/octave Linkwitz, Riley, Butterworth & Bessel on all outputs

6 favorites settings memorized in the amplifier

6 RCA outputs for connecting additional amplifiers (can also be configured for subwoofers)

Input noise attenuation treatment

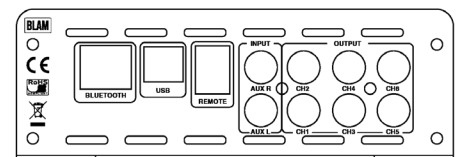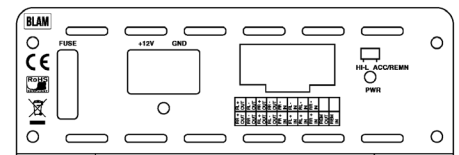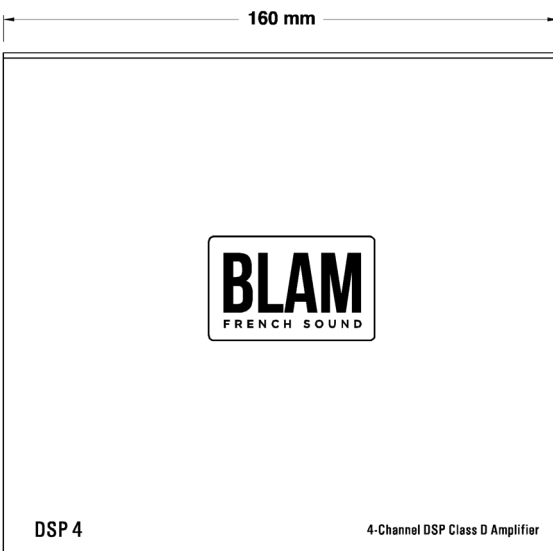

contact@blam-audio.fr
www.facebook.com/blamaudio

www.blam-audio.com