

LIVE

LA 4100

100 W x 4 CHANNEL CLASS AB PURE SQ AMPLIFIER

Guy Bonneville

BLAM

DRIVEN BY PASSION

KEY STRENGTHS

- Stability
- AB Class 4/3/2 Channel amplifier
Dedicated to sound quality
- Stable under 2Ω
- Audiophile Transistors
- High performance massive
heat dissipation chassis
- High power and current dynamic reserve



(optional)



We developed these amplifiers LIVE, by taking into account every parameter, we compared and listen to each component. The result is a huge reserve of energy that reproduce natural music with every detail and with impressive strength.

With their great volume, they dispose of a large dissipation surface that assures stability and performance. Their sober and robust design has high end finish and they are available in two colors black or silver.

BLAM wishes you long hours of enjoyment !

TECHNICAL FEATURE

RCA low-level inputs 0.5 V

RMS Power 4Ω) 4 x 100 Watts RMS

RMS Power 2Ω) 4 x 130 Watts RMS

RMS Bridged Power 4Ω) 2 x 260 Watts RMS

Low pass crossover 50 Hz - 3 kHz Rear) 12 dB/octave)

High pass crossover 50 Hz - 3 kHz Front), 15 Hz - 500 Hz Rear) 12 dB/octave)

Bass boost 0-10 dB at 45 Hz Rear)

Frequency response 10Hz - 45K Hz

Signal / noise ratio > 100 dB

Total harmonic distortion 0.01

Remote subwoofer level control 0 - 10 dB Rear) Optional)

Mono / Stereo selector Rear) Mirroring mode)



Protections short circuit / low impedance / reversal of polarity / heat protection

Dimensions L x W x H) 416 mm x 217 mm x 60 mm - 16.3" x 8.5" x 2.4"

Weight 4,352 Kg

It's also available in Black Edition

Remote control is optional

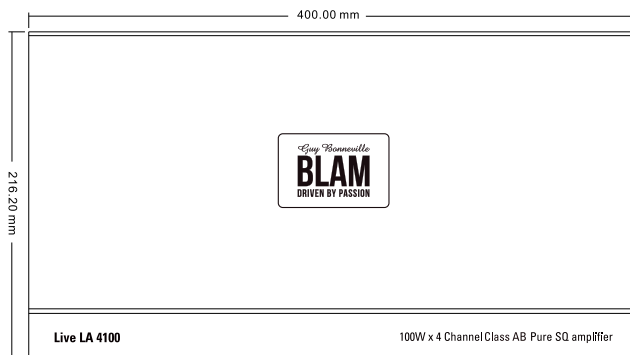

contact@blam-audio.fr

www.facebook.com/blamaudio

www.blam-audio.com