

LIVE

LA 500

500 W CLASS D MONO AMPLIFIER

Guy Bonneville
BLAM
DRIVEN BY PASSION

KEY STRENGTHS


- Powerfull
- Sound quality
- Stability
- Stable under 1 Ω



We developed these amplifiers LIVE, by taking into account every parameter, we compared and listen to each component. The result is a huge reserve of energy that reproduce natural music with every detail. The bass and extreme bass are precisely reproduced with impressive strength.

With their great volume, they dispose of a large dissipation surface that assures stability and performance. Their sober and robust design has high end finish and they are available in two colors black or silver.

BLAM wishes you long hours of enjoyment !

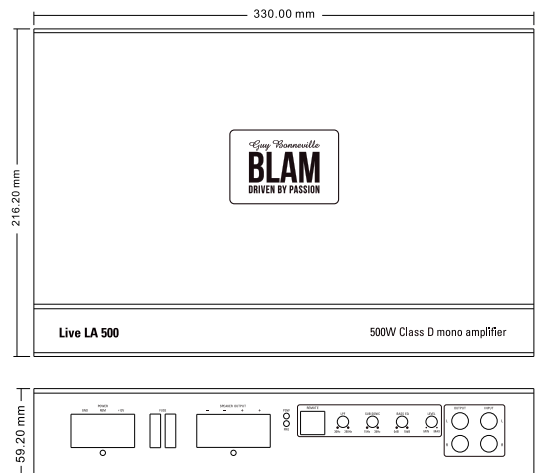

TECHNICAL FEATURE

RCA low-level inputs 0.5 V / 8.5 V

RMS Power 4 Ω) 230 Watts RMS

RMS Power 2 Ω) 400 Watts RMS

RMS Power 1 Ω) 500 Watts RMS

Low-pass crossover 30 Hz - 250 Hz 24 dB/octave)

Subsonic filter 15 Hz - 35 Hz 24 dB/octave)

Bass boost 0-10 dB at 45 Hz

Frequency response 15 - 250 Hz

Signal / noise ratio > 100 dB

Protections short circuit / low impedance / reversal of polarity / heat protection

Dimensions L x W x H) 346 mm x 217 mm x 60 mm - 13.6" x 8.5" x 2.4"

Weight 3,828 Kg

It's also available in Black Edition

Remote control is included

contact@blam-audio.fr

www.facebook.com/blamaudio

www.blam-audio.com