


# DSP 4.40

4.40 4-CHANNEL DSP AMPLIFIER, 4 HIGH-LEVEL INPUTS, 8 PRE-AMPLIFIED OUTPUTS WITH INTEGRATED DSP AND WIRELESS RECEPTION

- Powerfull
- Sound quality
- Stabilitly

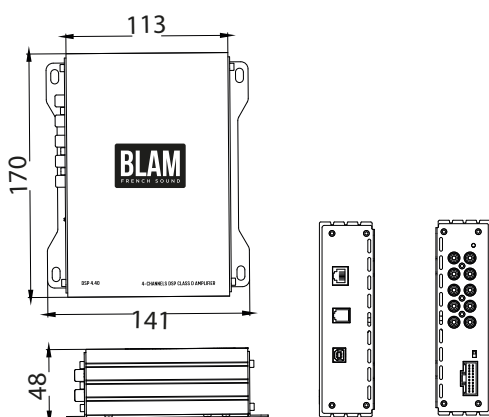

## TECHNICAL FEATURE

Maximum power: 4 x 60 Watts

Power (4 Ohm): 4 x 25 Watts RMS

Power (2 Ohm): 4 x 40 Watts RMS

4 high-level inputs

2 low level RCA inputs

8 RCA low level outputs

Frequency response: 20 Hz – 20 kHz

Distortion: 0.1%

Signal-to-noise ratio: 100 dB

Standby current < 0.4 mA

Maximum current consumption 30 A

Dimensions: 170 x 141 x 48 mm

## Supplied accessories :

- Remote control
- User manual
- USB cable for computer

## Optional accessory :

- Optional Plug & Play cable for installation in all vehicles without cutting the original wiring harness – optional

## DSP FEATURES

Control of DSP settings via the smartphone app connected via BT.

Audio streaming with the included BT receiver.

Adjustable time alignment from 0 to 20 ms for each speaker and phase adjustment

15-band independent parametric and graphic equalizer for the 8 output channels

Fully adjustable 6-48 dB/octave Linkwitz, Riley, Butterworth & Bessel filter on all outputs

8 favorite settings that can be stored in the amplifier

8 RCA outputs for connecting additional amplifiers (configurable to drive subwoofers)

Input noise attenuation treatment